



MASTERColour CDM-Rm Elite Mini



MASTERColour CDM-Rm Elite Mini 35W/930 GX10 MR16 10D

Mini, very high-efficiency Ceramic Metal Halide discharge reflector lamp producing crisp white sparkling light with high colour rendering

Warnings and Safety



- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

Product data

General Information		LLMF at end of nominal lifetime (nom.) 80 %	
Cap base	GX10	Luminous flux in 90° cone (rated)	2,100 lm
Operating position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical	
Switching Cycle	1,350	Power Consumption	39,1 W
Flux measurement reference	Narrow Cone	Warm-up time to 60% light	120 s
Life to 50% failures (nom.)	15,000 h	Voltage (nom.)	87 V
Light Technical		Voltage (nom.)	87 V
Colour Code	930 [CCT of 3000K]	Controls and Dimming	
Beam angle (nom.)	10 degree(s)	Dimmable	No
Luminous Flux	2,100 lm	Mechanical and Housing	
Luminous intensity (nom.)	17,500 cd	Bulb shape	MR16
Chromaticity Coordinate X (Nom)	0.434	Approval and Application	
Chromaticity Coordinate Y (Nom)	0.398	Energy Efficiency Class	G
Correlated Colour Temperature	3000 K		
Luminous efficacy (rated) (nom.)	60 lm/W		
Colour rendering index (CRI)	90		

MASTERCcolour CDM-Rm Elite Mini

Lifetime

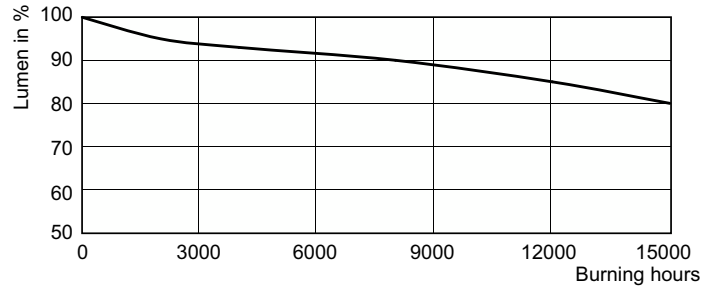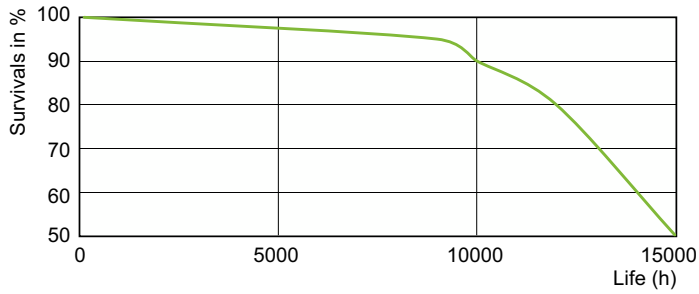

Life Expectancy Diagram - CDM-Rm Elite Mini 35W/930 GX10 MR16 10D

Lumen Maintenance Diagram - CDM-Rm Elite Mini 35W/930 GX10 MR16 10D

